


## 产品特点

- 低插入损耗
- 高稳定性和可靠性
- 紧凑的尺寸
- Epoxy-free on Optical Path


## 应用范围

- 色散补偿
- 双向传输系统
- 光纤传感器
- 添加/删除多路复用
- 仪器仪表测试、测量

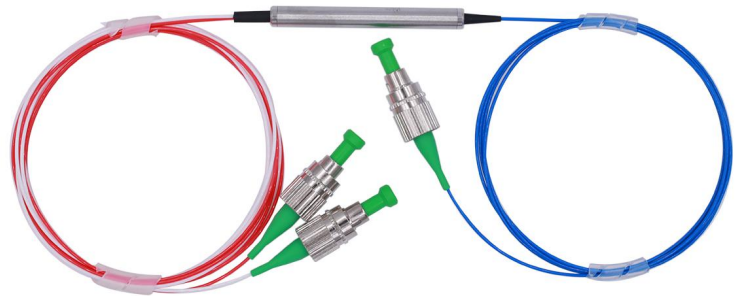

## 技术参数

Type		3 Port
Operating Wavelength (nm)		1310 or 1550
Bandwidth (nm)		$\pm 30$
Typ. Isolation (dB)		46
Isolation (dB)		$\geq 40$
Typ. Insertion Loss (dB)		0.7
Insertion Loss (dB) @ -5 to +70		$\leq 0.9$
Extinction Ratio	Type B (Both of axis)	$\geq 20$
	Type F (Fast axis blocked)	$\geq 22$
Cross Talk (dB)		$\geq 50$
Return Loss (dB)		$\geq 50$
Fiber Type		1310nm :PM 1310;1550nm:PM1550
Package Dimension (mm)		$\varnothing 5.5 \times L50$
Maximum Power Handling (mW)		$\leq 300$
Operating Temperature (°C)		-0 to +70
Storage Temperature (°C)		-40 ~ +85




\*Above specifications are for devices without the connectors.

\*Type A is Double Stage, Type B is Single Stage.

\*Fast Axis Blocking \*For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower, and ER will be 2dB lower.

\*The PM fiber and the connector key are aligned to the slow axis. fast axis is blocked.

## 产品尺寸

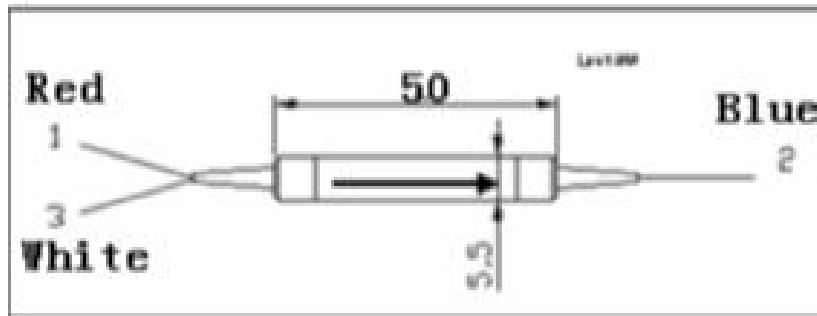

## 订购信息 HC-PMOC-A-B-C-D-E-F

	A	B	C	D	E	F
PMOC	Wavelength	Ports	Axis Alignment	Pigtail Type	Length	Connector
	1310=1310nm 1550=1550nm	3=3 Ports	F=Fast Axis Blocked B=Both Axis Working	1=250um 2=900um loose tube 3=3mm loose tube	H=0.5m 8=0.8m 1=1.0m 5=1.5m 2=2m	0=None 1=FC/UPC 2=FC/APC 3=SC/APC 4=SC/UPC 6=LC/PC