


**模块内部光路示意图**



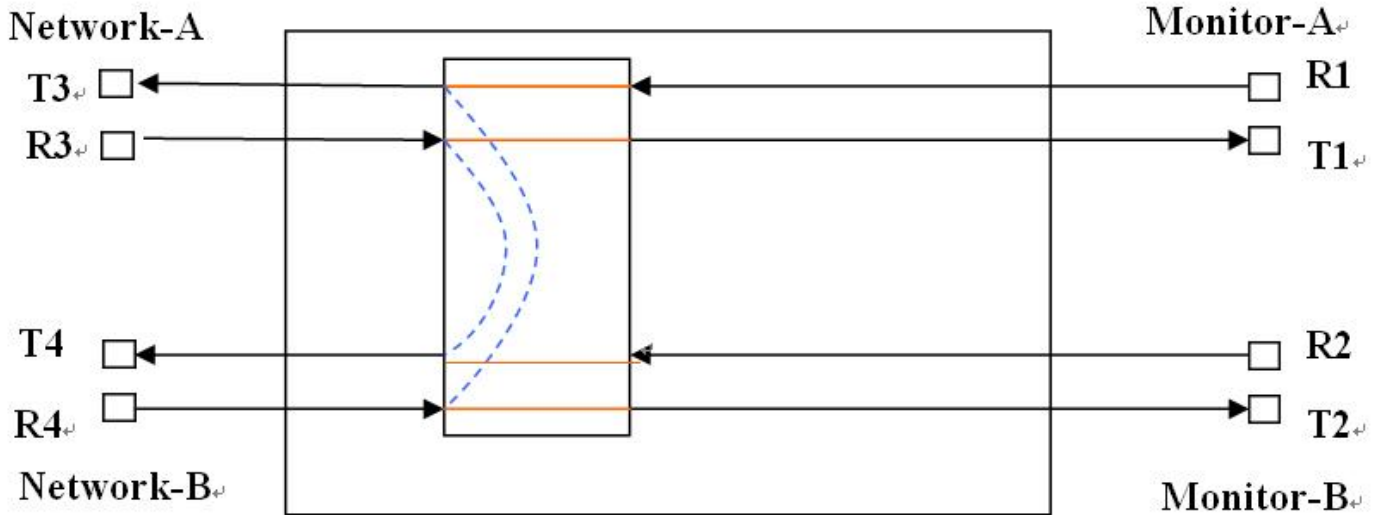

光路示意图

在线状态:


R3 → T1 R4 → T2 R1 → T3 R2 → T4

旁路状态: R3 → T4 R4 → T3

**功能**

-  掉电旁路
-  开机后保护器上电 (切换到在线状态), 系统断电立即回到旁路状态

**产品图**

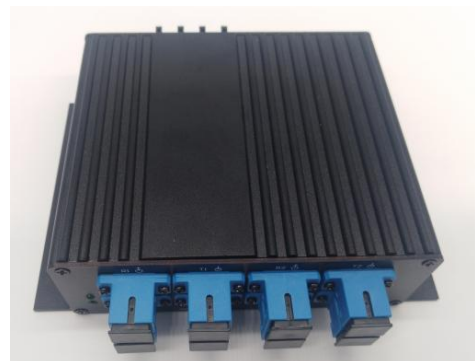

 技术参数

Wavelength range	1510 to 1610 nm 1270 to 1350 nm
Insertion loss	≤1.2dB
Polarization dependent loss	< 0.2dB
Wavelength dependent loss	< 0.3dB
Switching time	< 10ms
Switch cross talk	> 55 dB
Return loss	> 45 dB
Fiber type	Corning SMF-28, 250μm with 900μm loose tube
Fiber length	
Connectors	SC/PC
Operating power	100-300mW
Operating voltage	+12~+36V
Operating Temperature	-5 ~ 60 °C
Storage Temperature	-30 ~ 80 °C