

## 产品特点

- 低插入损耗
- 低 PDL
- 高隔离
- 可靠性强



## 应用范围

- WDM System
- MAN
- CATV System


## 技术参数

Parameter/		Specification
Channel Wavelength(nm)		1270-1610
Channel Spacing(nm)		20
Channel Passband (@-0.5dB bandwidth (nm))		> 13
Pass Channel Insertion Loss (dB)		≤0.8
Reflection Channel Insertion Loss/ (dB)		≤0.5
Isolation(dB)	Adjacent	> 30
	Non-adjacent	>40
	Reflection	> 12
Extinction Ratio (@23°C) (dB)		≥18
Directivity(dB)		>45
Return Loss (dB)		>45
Maximum Power Handling (mW)		300
Operating Temperature (°C)		-5~+70
Storage Temperature (°C)		-40~85
Package dimension (mm)		5.5×L38 for 900um loose tube

1.Above specification are for device without connector.

2.For devices with connectors,insertion loss will be 0.3dB higher,RL will be 5dB lower,and ER will be 2dB lower.

 尺寸

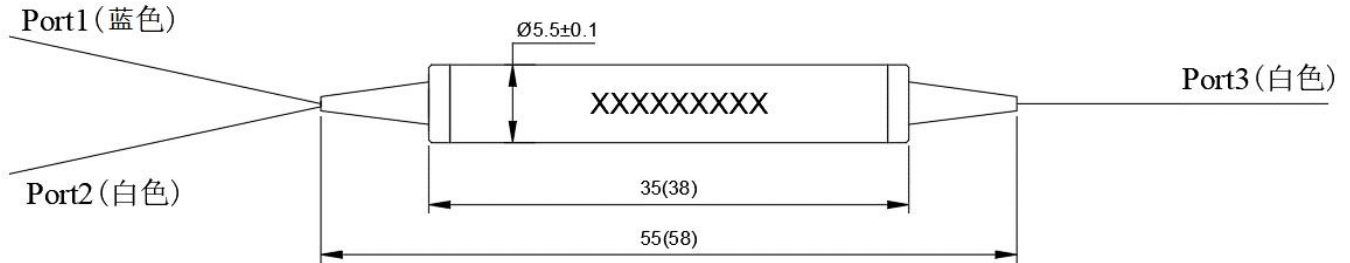

 订购信息： HC-PM-CWDM-A-B-C-D-E-F

A	B	C	D	E	F
Channel Spacing	Pass Channels	Axis Alignment	Fiber Type	Fiber Length	Connector
C=CWDM	01=1270 02=1290 ..... 18=1610	1=Fast Axis Blocked 2=Both Axis Working S=Specify	1=Bare fiber 2=900um loose tube	1=1m 2=2m S= Specify	0=None 1=FC/APC 2=FC/PC 3=SC/APC 4=SC/PC 5=ST 6=LC S=Specify