


技术参数

Type	Value
Operating Wavelength (nm)	1310 or 1550
Bandwidth (nm)	±40
Typ. Insertion Loss (at 23°C)	≤0.4
Max. Insertion Loss (at 23°C)	≤0.6
Extinction Ratio (at 23°C) (dB)	≥22
Return Loss (dB)	≥50
Fiber Type	Panda fiber
Package Dimension (mm)	φ5.5×L38
Maximum Power Handling (mW)	≤300
Operating Temperature (°C)	-0 to +70
Storage Temperature (°C)	-40 ~ +85

*Above specifications are for devices without the connectors.

*For device with connector, IL is 0.3dB higher, RL is 5dB lower, ER is 2dB lower. The default connector key is aligned to slow axis.

产品尺寸

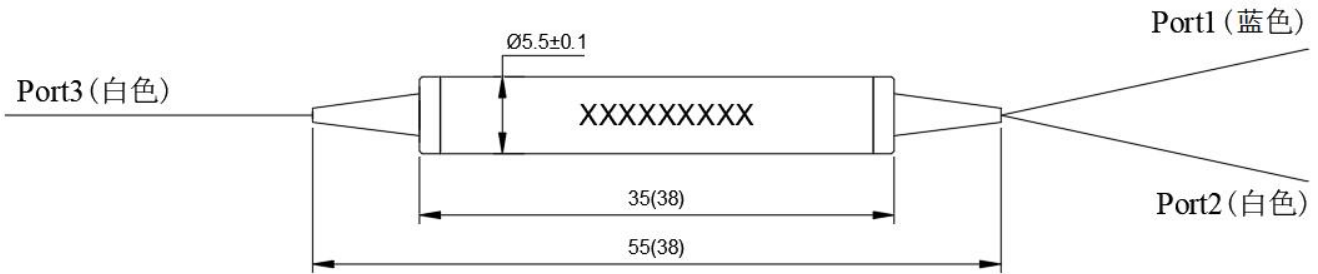

订购信息 : HC-PMIS-A-B-C-D-E

A	B	C	D	E
Wavelength	Axis Alignment	Pigtail Type	Length	Connector
1310=1310nm 1550=1550nm	F=Fast Axis Blocked B=Both Axis Working	1=250um 2=900um loose tube 3=3mm loose tube	H=0.5m 8=0.8m 1=1.0m 5=1.5m 2=2m	0=None 1=FC/UPC 2=FC/APC 3=SC/APC 4=SC/UPC 5=LC/PC